IC408A

4-Port USB Extender over LAN Quick Start Guide

Extend all USB 2.0 devices to hosts across a Gigabit Ethernet Local Area Network (LAN) using existing cabling.

Network Connect

❶ Place the Local Extender where desired and connect the CAT5e patch cable from the Link port (RJ-45) to a network switch or wall network port connected to a switch.

Maximum 330 ft. (100 m) between network devices

❷ Connect the Local Extender to the computer using the included USB cable.

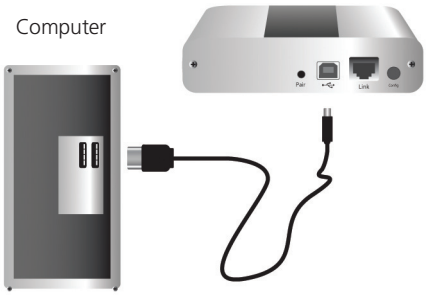

❸ Place the Remote Extender where desired. Connect the CAT5e patch cable from the Link port (RJ-45) to a network switch or wall network port connected to a switch and connect the Remote Extender to a power source.

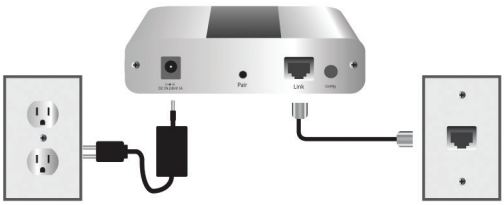

Maximum 330 ft. (100 m) between network devices

❹ Attach the USB device(s) to the Remote Extender.

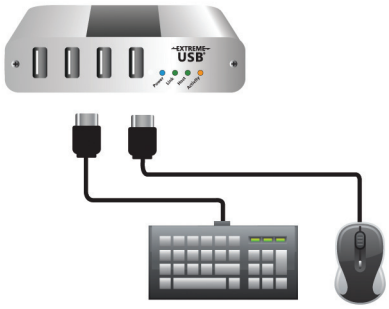

Customer Support Information

Order toll-free in the U.S.: Call 877-877-BBOX (outside U.S. call 724-746-5500)
FREE technical support 24 hours a day, 7 days a week: Call 724-746-5500 or fax 724-746-0746
Mailing address: Black Box Corporation, 1000 Park Drive, Lawrence, PA 15055-1018
Web site: www.blackbox.com • E-mail: info@blackbox.com

Direct Connect

❶ Place the extenders where desired and connect the CAT5e extension link cabling to the Link ports (RJ-45) on the Local and Remote Extenders.

Maximum 330 ft. (100 m) between devices

❷ Connect the Local Extender to the computer using the included USB cable.

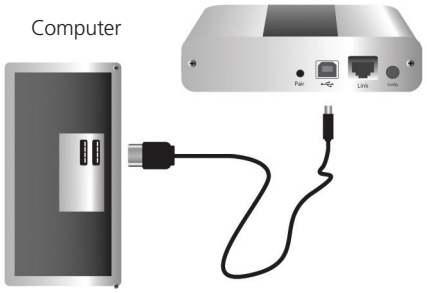

❸ Connect the Remote Extender to the AC adapter and a power source.

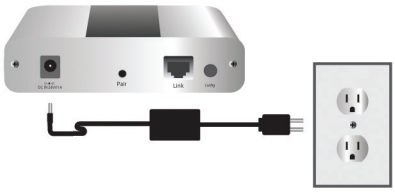

❹ Attach the USB device(s) to the Remote Extender.

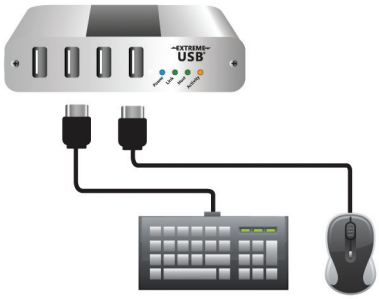

BLACK BOX® NETWORK SERVICES

© Copyright 2013. Black Box Corporation. All rights reserved. Printed in U.S.A. Black Box® and the Double Diamond logo are registered trademarks of BB Technologies, Inc. Any third-party trademarks appearing in this manual are acknowledged to be the property of their respective owners.

IC408A Quick Start Guide, version 1